



LOM-BOLL14021A3AN

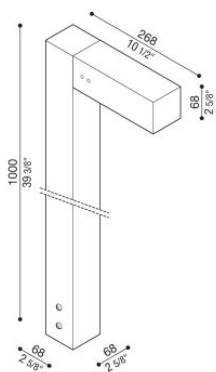

Technical information:

Installation:	Ground
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Cataphoresis
Diffuser type:	Etched glass
Optics:	Asymm.
Lamp type:	LED
Energy performance class:	G
Colour temperature:	3000K
CRI:	>80
LB Factor 50.000 h:	L80B20
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	1350
Real Lumen:	Max 855
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	☐ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK ENEC

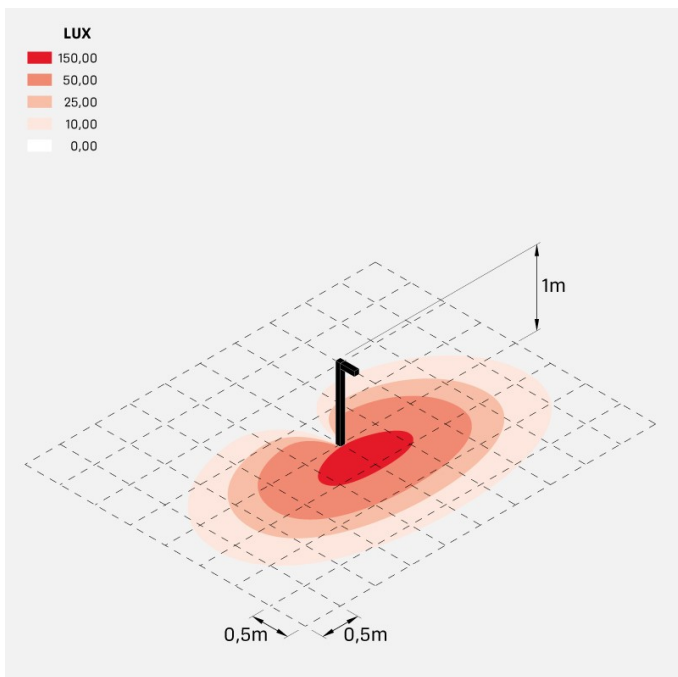

H1000 pole and fixing base included.

